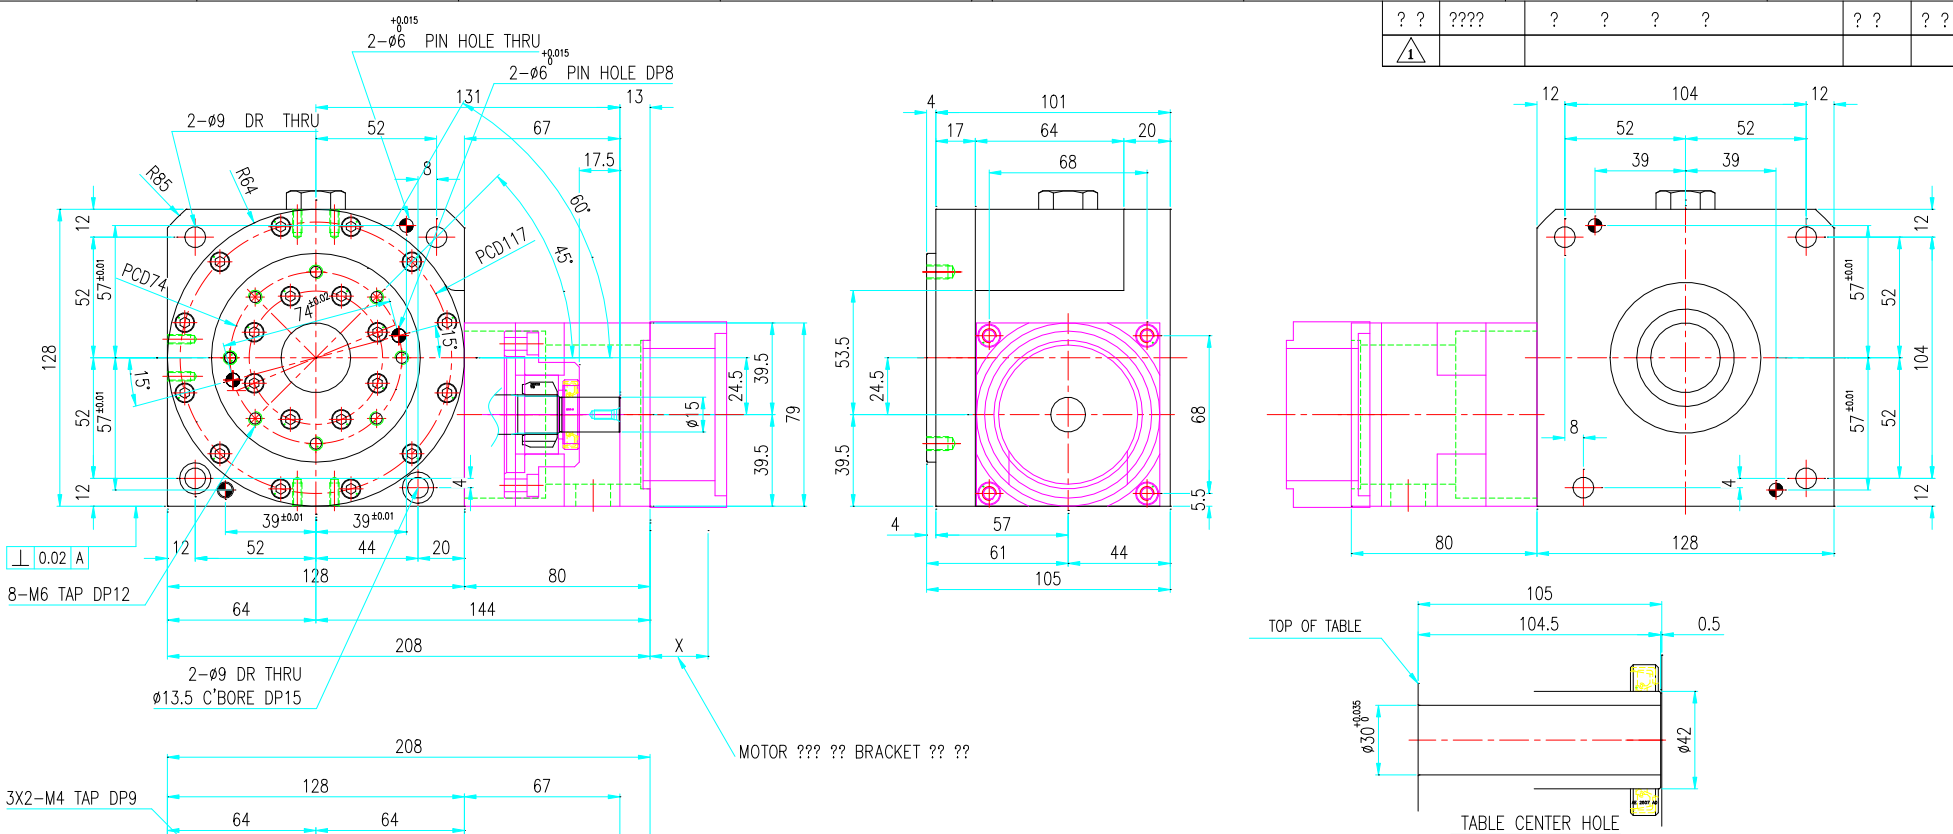

? ?	????	? ? ? ?	? ?	? ?
1				

HGRT-130-40-I SPECIFICATIONS

INDEXING ACCURACY	± 20 sec	BACK LASH	0.015~0.020 mm
REPEATABILITY	± 8 sec	REDUCTION RATIO	1/40
ROTATION RUN OUT	0.025mm	SPINDLE DEAD-END RUN OUT	0.025mm
MAXIMUM ROTATION SPEED	TABLE 75 min⁻¹ / MOTOR 3,000 min⁻¹	ALLOWABLE MASS OF WORK	HORIZONTAL:170 kg / VERTICAL:100 kg
ALLOWABLE MAX MOTOR POWER	200w-1.0Kw / 23 N.m	ALLOWABLE MASS OF LOAD	HORIZONTAL:600Nm / VERTICAL:400Nm
TABLE SUPPORT BEARING	CROSS ROLLER BEARING	WEIGH	13Kg

NOTE.
1. ?????? ????? ?? ?? ???.

???? ???	???(±) ??? : C	? ?	–	? ?	–
0.5?? ?? 6	???.95 ??? : R				
6?? ??30	? 0.1	?	–	? ?	1/3
30?? 120	? 0.15				
120?? 315	?0.2	?		? ?	KG
315?? 1000	?0.3				
1000?? 2000	?0.5	??	–		
? (?? ??) ????	? P.D.S 19 12 12	??			

I.P.S CO.LTD

??? HYPOID DRIVE
HGRT 130-40-I
? ? ASS'Y
1/3

? ? D R T – N 1 3 – 1 0 0 A

A3(420x297)